
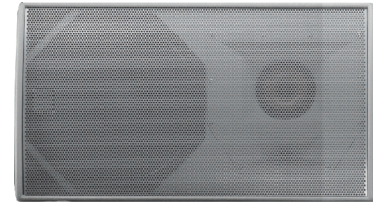


Features /

Compact three-way passive system ,
Multi-angle birch ply enclosure ,
User rotatable 65° x 40° horn ,
High power output Flexible mounting options

Applications/

Club sound reinforcement ,
Unobtrusive stage monitoring ,
Fill-in system for main PA ,
AV presentations

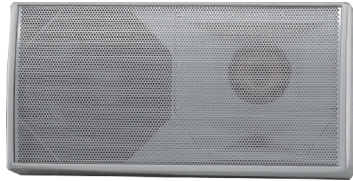

Technical Specifications

| | | |
|----------------------------|---|---|
| Rated Power AES | 450W | 550W |
| Peak Power | 2000W | 2200W |
| Nominal Impedance | 8Ω | 8Ω |
| Frequency Response(+/-3dB) | 65Hz--18KHz | 55Hz--18KHz |
| Sensitivity(2.83V/1m) | 97dB | 100dB |
| Maximum Spl Continuous | 120dB | 125dB |
| Maximum Spl Peak | 126dB | 131dB |
| Dispersion -6dB | | |
| Horizontal | 65° | 65° |
| Vertical | 40° | 40° |
| Drive Specification | | |
| LF Drive | 1X12"(310mm)/3"Voice Coil | 1X15"(380mm)/3"(75mm)Voice Coil |
| MID Drive | 1X6.5"(165mm)Horn Loaded Mid-rang | 1X6.5"(165mm)Horn Loaded Mid-rang |
| HF Drive | 1"exit Compression Driver 1.75"Voice Coil | 1"exit Compression Driver 1.75"Voice Coil |
| Connectors | Low profile 20 amp push-lock | Low profile 20 amp push-lock |
| Enclosure Material | Plywood | Plywood |
| Cabinet Finish | Textured Polyester Paint | Textured Polyester Paint |
| Hoisting Set | 10 x M8 | 8 x M8 |
| Dimensions (WxHxD) | 696X356X415 | 759X417X425 |
| Weight(kg) | 25kg | 32kg |