
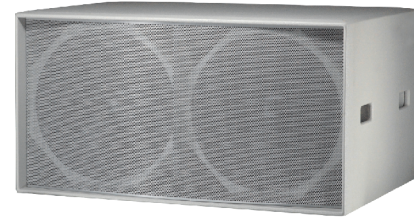


Features /

- Very compact sub-bass system
- Long excursion bass driver
- Active/passive operation
- Top hat fitting for pole mounting Aq10 to AQ153
- Five year limited warranty

Applications/

- Club sound reinforcement
- Theatre sub-bass
- AV presentations



Technical Specifications

| | | |
|----------------------------|------------------------------------|------------------------------|
| Rated Power AES | 800W | 2000W |
| Peak Power | 3200W | 6000W |
| Nominal Impedance | 4Ω | 4Ω |
| Frequency Response(+/-3dB) | 40Hz--150Hz | 30Hz--150Hz |
| Sensitivity(2.83V/1m) | 99dB | 102dB |
| Maximum Spl Continuous | 129dB | 130dB |
| Maximum Spl Peak | 135dB | 136dB |
| Dispersion -6dB | | |
| Horizontal | | |
| Vertical | | |
| Drive Specification | | |
| LF Drive | 2X12" (300mm)/3" (75mm) voice coil | 2X18"(460mm)/4"Voice Coil |
| HF Drive | | |
| Connectors | Low profile 20 amp push-lock | Low profile 20 amp push-lock |
| Enclosure Material | Plywood | Plywood |
| Cabinet Finish | Textured Polyester Paint | Textured Polyester Paint |
| Hoisting Set | | |
| Dimensions (WxHxD) | 860X385X437 | 1066X561X780 |
| Weight(kg) | 35kg | 79.5kg |